


TRVX250
Single Stage
Liquid Ring Vacuum Pump



200 Newsome Drive
 Yorktown, VA 23693
 1-800-535-4243
 www.Travaini.com

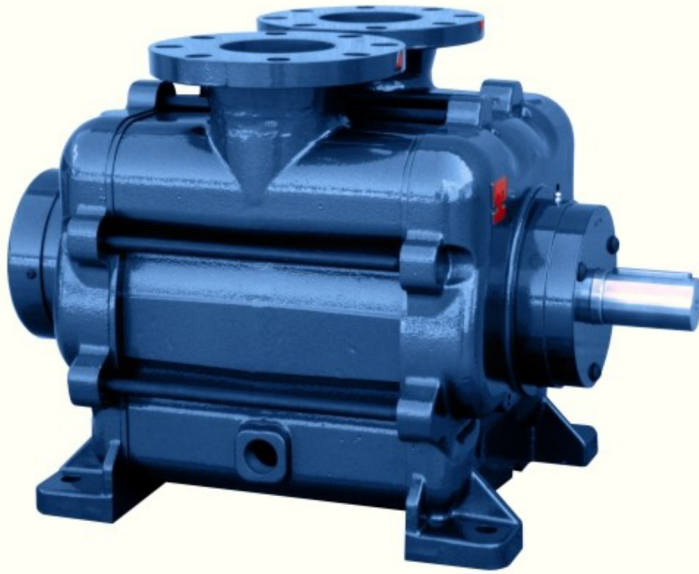

Pressure Range	25-760 TORR
Capacity	40 CFM
Features	Single-Stage vacuum pump with external bearings, vari-port design
Shaft Sealing Options	Mechanical seal (standard) Double mechanical seal Stuffing box
Options	Bareshaft pump Coupled to electric motor Monoblock
Optional Accessories	Available as a component in larger assembly

Technical Data

PUMP TYPE		TRVX257
Speed	RPM	3600
Motor - installed power	HP	3
Average service liquid flow	GPM	1
Noise level at 150 Torr	dB(A)	71dB
Max Vacuum	Torr	25

Standard Materials of Construction**

Part No.	Description	F	RX	RA	A3
106	Suction casing	Cast iron			Stainless steel AISI 316
107	Discharge casing				
110	Impeller housing				
137	Port plate	Stainless steel AISI 316			
210	Shaft	Stainless steel AISI 420	Stainless steel AISI 316		
357	Bearing housing	Cast iron			
230	Impeller	Ductile iron	Stainless steel AISI 304	Stainless steel AISI 316	

Model Designation

TRVX257/C/RA	
T	Travaini manufacturer
R	Liquid ring pump
V	Single stage vacuum pump With vari-port design
X	Design revision
20	Flange size (mm)
7	Hydraulic size
C	Shaft sealing: C = Mechanical seal C2 = Double mechanical seal B = Packing seal
RA	Materials of construction (see table)

**Special materials available upon request

-Request for information on our WATERSEAL and DYNASEAL engineered vacuum systems

-For further information please consult Travaini Pumps USA.

REF:	JM/CGZ	Date	1/21/2020	No.:
------	--------	------	-----------	------